



Light Industry will change the world, and YAESU will change the world. **VISION 2020 Eco**

From Inhuman world to the organic view of the world.



ZCUT Series

Make cutting easy and speedy.

ZCUT-9 Series



ZCUT-9GR

- Equipped with Programming Function
Possible to cut a different length as programmed.
- Remove Roller Unit without using any tools and easy to take maintenance.



- Six different lengths can be programmed to cut.
- Possible to cut two roll tapes at the same time due to Dual Photo Sensor.
- Preset and Loop Counter.
- Set a tape without using bobbin.

Series Line Up



ZCUT-9GR
Arm Stand

Available Tape

Filament, Strong, Acetate, Glass-cloth, Double-sided, Normex, and others



ZCUT-9GRRP

Tape Dispenser with Edge Folding Function.

ZCUT-10



Tape Dispenser turning table only one in the world.

ZCUT-870



ZCUT-870

- Bobbin free is designed to be used for various sizes of tapes.
- Freely set the movable sensor where tape stops.
- Unnecessary to adjust cutting blade due to easy and safe.

Available Tape

Filament, Kapton, Acetate, Glass-cloth, Double sided, Aluminium Foil, Cellophane, Masking, Polyethylene, Copper, Cloth, Teflon, Paper, and others



Digital Tape Dispenser Z CUT Series

Apply to various kinds of industry and tapes.

ZCUT-3 Series



ZCUT-3 ZCUT-3 STAND (※option)

- Durable for long-hours operation and suitable for cutting tapes.
- Wide range of selection as depends on tape width (60 · 80 · 150 · 250/mm).
- Modify as depends on what kind of tape you use.
- Apply to Protection Film, Aluminium Foil, and non-adhesives tapes.

Available Tape

Protection Film, Aluminium Foil, Craft, Cloth, Vinyl, Glass-cloth, Paper, Packing tapes, Mylar, Double sided, Combination tapes, and others

Series Line Up

All 5 model for ZCUT-3 series lines up



ZCUT-3080



ZCUT-3150



ZCUT-3250



ZCUT-3RP

Tape cutting machine with function to peel backing paper.

One machine can cover wide range of tape.

ZCUT-6




ZCUT-6 ZCUT-6 STAND (※option)

- Apply to wide range of tape size as tape width 80mm at maximum.
- Durable for 24 hours operation.
- Auto Feed & Cut.
- Possible to set the cutting length by 1mm.

Available Tape

Craft, Cloth, Vinyl, Glass-cloth, Packing tapes, and others

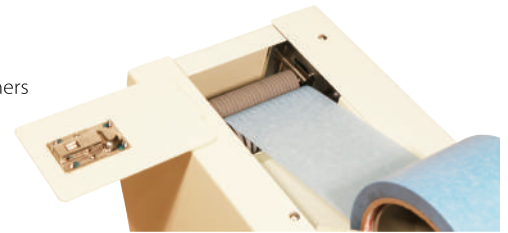

ZCUT Series Specification Table

| Model | Cutting Length | Tape Width | Dia. of Outside Roll | Power Voltage | Dimension | Weight |
|-------------|-------------------------------|-------------|----------------------------------|----------------------|-------------------------|--------|
| ZCUT-9 GR | 5 - 999 mm | 6 - 60 mm | 300 mm | AC 100V 50/60Hz 25W | 116(W)×140(H)×213(D) mm | 1.6kg |
| ZCUT-9 GRRP | 5 - 999 mm | 6 - 60 mm | 150 mm (Internal diameter 75 mm) | AC 100V 50/60Hz 25W | 116(W)×302(H)×320(D) mm | 3.3kg |
| ZCUT-10 | 5 - 999 mm (folding 15~999mm) | 6 - 60 mm | 300 mm | AC 100V 50/60Hz 25W | 116(W)×148(H)×222(D) mm | 1.83kg |
| ZCUT-870 | 15 - 70 mm | 3 - 25 mm | 150 mm | AC 100V 50/60Hz 25W | 126(W)×150(H)×258(D) mm | 1.9kg |
| ZCUT-6 | 40 - 999 mm | 15 - 80 mm | 150 mm (Include Stand 260/330mm) | AC 100V 50/60Hz 400W | 144(W)×289(H)×237(D) mm | 9.2kg |
| ZCUT-3 | 40 - 999 mm | 15 - 60 mm | 200 mm (Include Stand 400mm) | AC 100V 50/60Hz 400W | 191(W)×298(H)×247(D) mm | 11.5kg |
| ZCUT-3080 | 40 - 999 mm | 15 - 80 mm | 140 mm (Include Stand 300mm) | AC 100V 50/60Hz 400W | 191(W)×298(H)×299(D) mm | 12kg |
| ZCUT-3150 | 40 - 9999 mm | 15 - 150 mm | 200 mm (Include Stand 400mm) | AC 100V 50/60Hz 600W | 332(W)×298(H)×247(D) mm | 16kg |
| ZCUT-3250 | 40 - 9999 mm | 15 - 250 mm | 200 mm (Include Stand 400mm) | AC 100V 50/60Hz 600W | 432(W)×298(H)×247(D) mm | 18kg |
| ZCUT-3 RP | 40 - 999 mm | 15 - 50 mm | 150 mm (Internal diameter 75 mm) | AC 100V 50/60Hz 400W | 191(W)×342(H)×402(D) mm | 13kg |

※Specifications are subject to change without prior notice.
 ※Stand is all optional extra.

※Some of usable tapes may not be cut as depends on tape manufacturer.
 ※Cutting length may not be within tolerance as depends on tape material.


XCUT-150

TAPE DISPENSER

Digital Tape Dispenser


Straight Cut Edge and Designed for low noise and less vibration.

XCUT-150

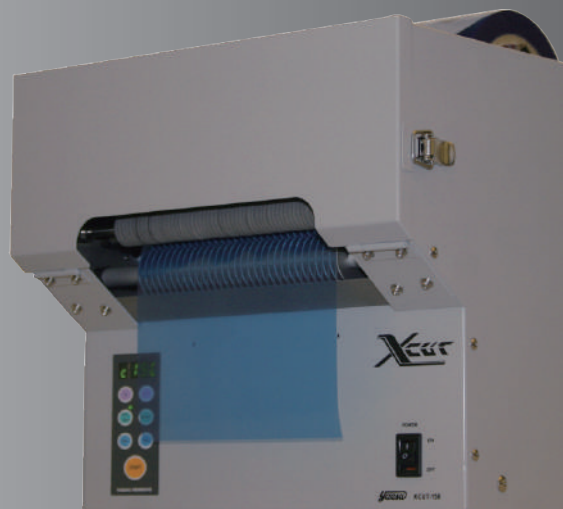

Available Tape

Craft, PP, Vinyl, Filament, Glass Cloth, Double-Sided, Strapping, Protective Film, Aluminum Foil, and others

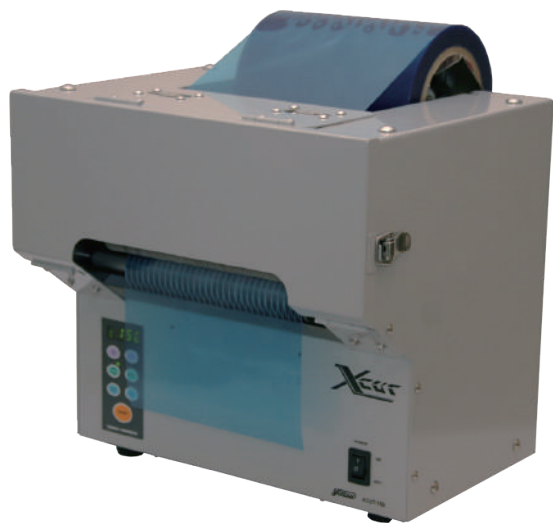

- Memory Function / 3digital-6 memories, 4digital-1 memory.
- Preset Counter, Loop Function.
- Memorize the number of the present cutting pieces.
- Auto feeding that cutting tape is ready to remove after taking the piece of tape.

Specification

| Model | Cutting Length | Tape Width | Feeding Speed | Max. Outside Dia. of Roll | Rated Voltage | Dimension | Weight |
|----------|------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------|---------------------------|-------------------------|-------------------------|--------|
| XCUT-150 | 30 - 9999 mm (When in manual use.) 60 - 9999 mm (When in auto use.) | 20 - 150 mm | 72 pcs/min. (In the case of cutting 100mm with craft tape.) | 200 mm | AC 100~240V 50/60Hz 45W | 292(W)×276(H)×239(D) mm | 9.7kg |

※Some of usable tapes may not cut as depends on the material and tape brand. ※Specifications are subject to change without prior notice.

※Cutting length may be beyond cutting tolerance as depends on the type of tapes.

New Sensational Bobbin-less Label Dispensers.

LDX Series



LDX-120

- Apply to 6 different modes as depends on operating condition.
- Label fixed by Label Hold Wing is to prevent the side-slip of label.
- It is very easy to adjust label position by one dial.
- No scattering is happened and easy to remove label roll by hand.

Easy setting by button press!



- **Auto Mode** Label will automatically come after you take label.
- **Manual Mode** Press the start button and adjust the length of label.
- **L Mode** Easily set up the label stop position.
- **C Mode** It is possible to set up counting the number of label up to 9999.
- **P Mode** Set up the number of label as you need to remove.
- **F Mode** It is possible to set up the feeding speed of the label by 6 different levels.

Operability is the first Priority
Compact/Energy Saving.

Series Line Up



LDX-60

LDX-180

This is the fastest and most durable Antistatic Label Dispenser.


HLD-2000

- Remove and dispense over 130pcs labels per minute. (40mm pitch label)
- Durable for 24 hours operation.
- Easily set up the photo sensor for label dispensing.
- Backing paper will be automatically rolled.

Antistatic Label Dispenser.

PLD-3000

- Standstill tolerance 0.14mm minimum.
- Easily set up the photo sensor for label dispensing.
- Possible to peel security tapes and die-cut parts.
- Compact designed for cell-system.

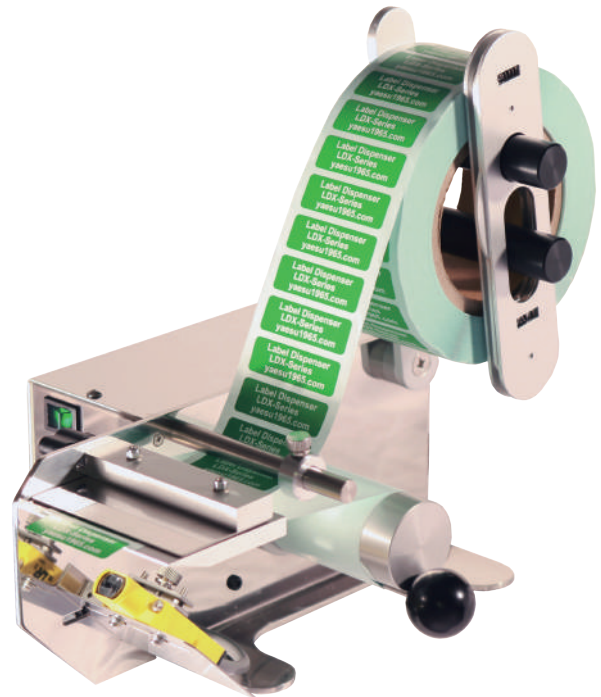

LDX HLD PLD Specification Table

| Model | Width of Backing Paper | Label Length | Dia. of Outside Roll | Power Voltage | Dimension | Weight |
|----------|------------------------|--------------|----------------------|------------------------|-------------------------|--------|
| LDX-60 | 15 - 60 mm | 10 - 999 mm | 200 mm | AC 100V 50/60Hz 40W | 104(W)×140(H)×215(D) mm | 2.1kg |
| LDX-120 | 15 - 120 mm | 10 - 999 mm | 250 mm | AC 100V 50/60Hz 45W | 164(W)×157(H)×231(D) mm | 3.3kg |
| LDX-180 | 15 - 180 mm | 10 - 999 mm | 300 mm | AC 100V 50/60Hz 50W | 224(W)×157(H)×241(D) mm | 4.6kg |
| HLD-2000 | 10 - 75 mm | 15 - 100 mm | 180 mm | AC 100V 50/60Hz 18/20W | 192(W)×170(H)×253(D) mm | 4.2kg |
| PLD-3000 | 4 - 75 mm | 4 - 100 mm | 180 mm | AC 100V 50/60Hz 8/10W | 192(W)×170(H)×253(D) mm | 3.1kg |


※Bobbin free is limited.

※Specifications are subject to change without prior notice.


Cut OPP rolled film into various sizes of lengths at high speed.

FD-160 II FD-200 II

Equipped rolled film without bobbin.

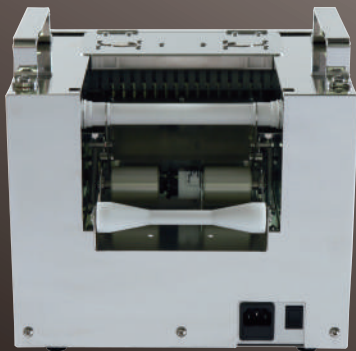

(FD-160 II with Film Holder)

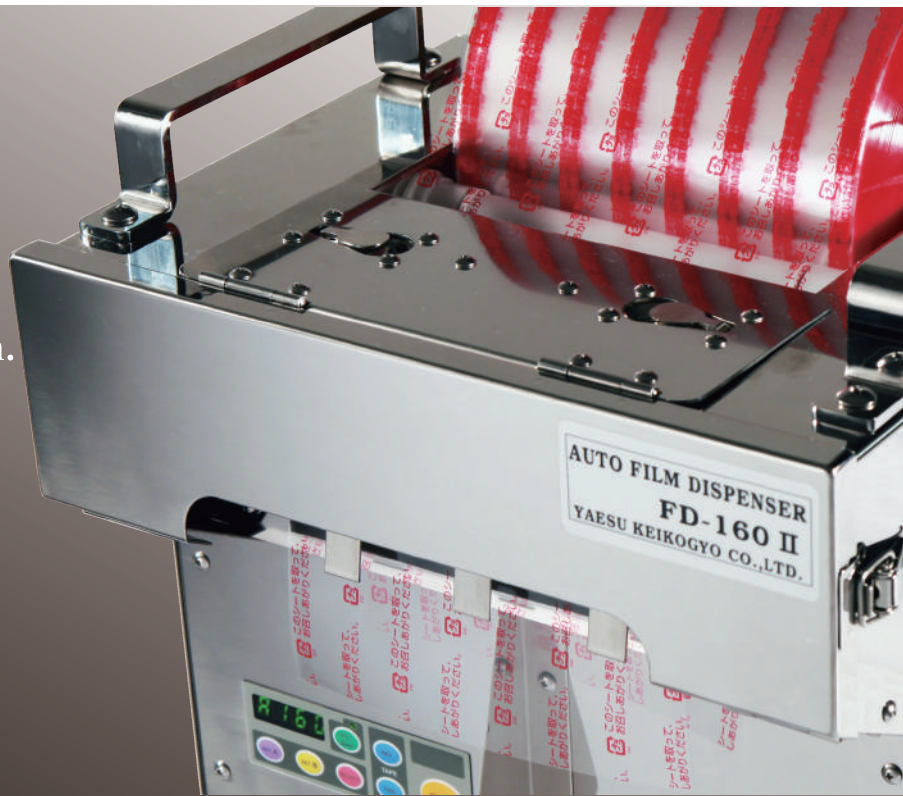

FD-160 II / 200 II

ONLY ONE MODEL



FD-160 II / 200 II

Operation Panel



Cut a film setting by 1mm and memorize 6 different length of cutting in memory function, counting the number of cut, and preset counter loop function.

**Cutting neither cost
nor stock.**

- More efficiency and hygiene due to no touch to other film.
- High speed cutting 65pcs per minute (100mm length).
- High durability due to stainless steel body.

Reduce the cost as compared with pre-cut-film and no need to have a different size of film in stock.

Cutting Blade in Scissor style (Tool Steel)

Cutting blade in scissor style provides a better cutting, which positions at the rear for safety design.

FD-160 II FD-200 II Specification Table

| Model | Cutting Length | Film Width | Dia. of Outside Roll | Power Voltage | Dimension | Weight |
|------------------------------|----------------|------------|----------------------|---------------------|-------------------------|--------|
| FD-160 II (with Film Holder) | 20~999 mm | Max160 mm | Max210 mm | AC 100V 50/60Hz 25W | 292(H)×273(H)×232(D) mm | 10.6kg |
| FD-200 II (with Bobbin) | 20~999 mm | Max200 mm | Max210 mm | AC 100V 50/60Hz 45W | 332(H)×273(H)×232(D) mm | 11.1kg |

※Specifications are subject to change without prior notice.

Variety of films for wide range of application including Food Industry.

OPP Film

20 μ m defogging
40 μ m laminated print



We are dealing various kinds of films, and however, we will produce as depends on your inquiry.





The agency in the world



Yaesu

No Products, No Mind.
カタチにできない思いはない。



Contact us

Further information on products and services now available from the Internet.

<http://yaesu1965.com>

YAESU KEIKOGYO CO.,LTD

39-8 Senju Motomachi, Adachi-Ku, Tokyo, 120-0041, Japan